




◆选 型 Type Selection

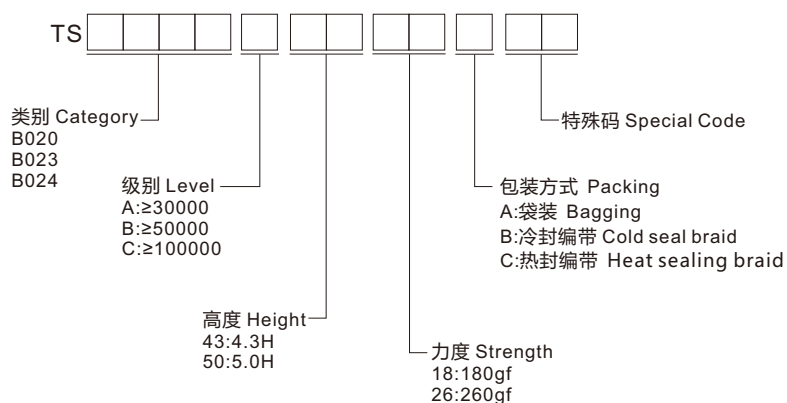

◆规 格 Specifications





- 使用温度 Operating temperature : $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- 最大额定值 Maximum rating : 50mA 12V DC
- 最小额定值 Minimum rating : 10 μ A 1V DC
- 接触电阻 Contact resistance : $\leq 100\text{m}\Omega$
- 绝缘电阻 Insulation resistance : $\geq 100\text{M}\Omega$
- 耐电压 Withstand voltage : 250V AC

◆材 质 Material

- 接触点 Contact point : 铜合金 Copper alloy
- 本体 Ontology : PPA/LCP
- 弹片 shrapnel : 不锈钢 Stainless steel
- 盖板 Cover : 铁/铜合金 Iron/copper alloy
- 按钮 Button : PPA/LCP

◆图 表 Diagram

■ TS-B020







安装图
instructions



电路图
Circuit diagram

■ TS-B023







安装图
instructions



电路图
Circuit diagram

■ TS-B024



安装图
instructions



电路图
Circuit diagram